

# SERIE 7S

Industriale  
Industrial  
Industrielle  
Industrial  
Industrielle

Per Trattori - Hp  
For Tractors - Hp  
Pour Tracteurs - Cv  
Para Tractores - Cv  
Für Schlepper - PS

**120-200**



**BRACCIO SFILÒ DI SEZIONE ESAGONALE**  
**TELESCOPIC EXTENSION ARM OF HEXAGONAL SECTION**  
**BRAS TÉLESCOPIQUE DE PROFIL HEXAGONAL**  
**BRAZO EXTENSIÓN DE SECCIÓN HEXAGONAL**  
**AUSLEGERARM MIT SECHSKANTQUERSCHNITT**

**Dotazioni standard (Serie 7)**  
*Standard Equipment (Serie 7)*  
*Equipements Standard (Serie 7)*  
*Equipo Estándar (Serie 7)*  
*Serienmäßige Ausstattung (Serie 7)*

Modello Model Model Model Model	Profondità di scavo (mm) Digging depth (mm) Profondité de travail (mm) Profundidad de excavación (mm) Grabungstiefe (mm)	Angolo di rotazione Rotation angle Angle de rotation Ángulo de rotación Drehwinkel	Larghezza telaio traslante (mm) Moving frame width (mm) Largeur bâti coulissant (mm) Ancho del chasis deslizante (mm) Breite verschiebbarer Rahmen (mm)	Peso (kg) Weight (kg) Poids (kg) Peso (kg) Gewicht (kg)	Prezzo € Price € Prix € Precio € Preis €
<b>7S</b>	<b>4650</b>	<b>180°</b>	<b>2000</b>	<b>1190</b>	

## SPECIAL EQUIPMENT:

**Equipaggiamento speciale: pompa maggiorata 70 l/min, deviatore elettrico, distributore 8 elementi, due linee aggiuntive da 1/2" in punta al braccio. Special equipment: uprated pump 70 l/min, electric switch, distributor with 8 elements, two 1/2" additional lines at the jib end.**  
**Équipement spécial: pompe augmentée 70 l/min, commutateur électrique, distributeur avec 8 éléments, deux lignes supplémentaires 1/2" à la flèche.**  
**Equipamiento especial: bomba aumentada 70 l/min, desviador eléctrico, distribuidor de 8 elementos, dos líneas adicionales de 1/2" en la punta del brazo.**  
**Spezialausrüstung: Verstärkte Pumpe 70l/Min, Wechselschalter, Hydraulikventil mit 8 Elementen, zwei Zusatzleitungen zu 1/2" oben am Ausleger.**


## SERIE 7S

**The standard equipment of the Serie 7S is the same 7, plus the telescopic boom.**

See the technical sheet to understand the different measures.

### STANDARD EQUIPMENT SERIE 7 – SERIE 7S

- Backhoe with moving frame with hydraulic locking, applicable to the three-point hitch of the hydraulic boom.
- 180° central rotation by 1 cylinder (patented).
- Independent hydraulic stabilisers with block valves.
- Independent system with 27 cm<sup>3</sup>/rev., pump, multiplier, 59-lt builtin tank, oil strainer and hydraulic oil.
- Element distributor with 60 lt/1' flow rate, control levers and built-in shock-absorbing anti-cavitation valves.
- Max working pressure: 190 bar.
- Standard bucket: 300 mm.
- Boom locking tensioners.
- Joints with pins and bushes of case-hardened and tempered steel.
- Chrome-plated double-liner cylinder rods.
- Sanding and polyester powder coating.
- Accessories on request: 250-400-500-600-700 mm bucket, 800-1000-1200 mm ditch cleaning bucket, 800-1000-1200 mm ditch cleaning tilting bucket, trapezoidal bucket, hydraulic rotator, grab, manure fork, drill, hydraulic hammer.

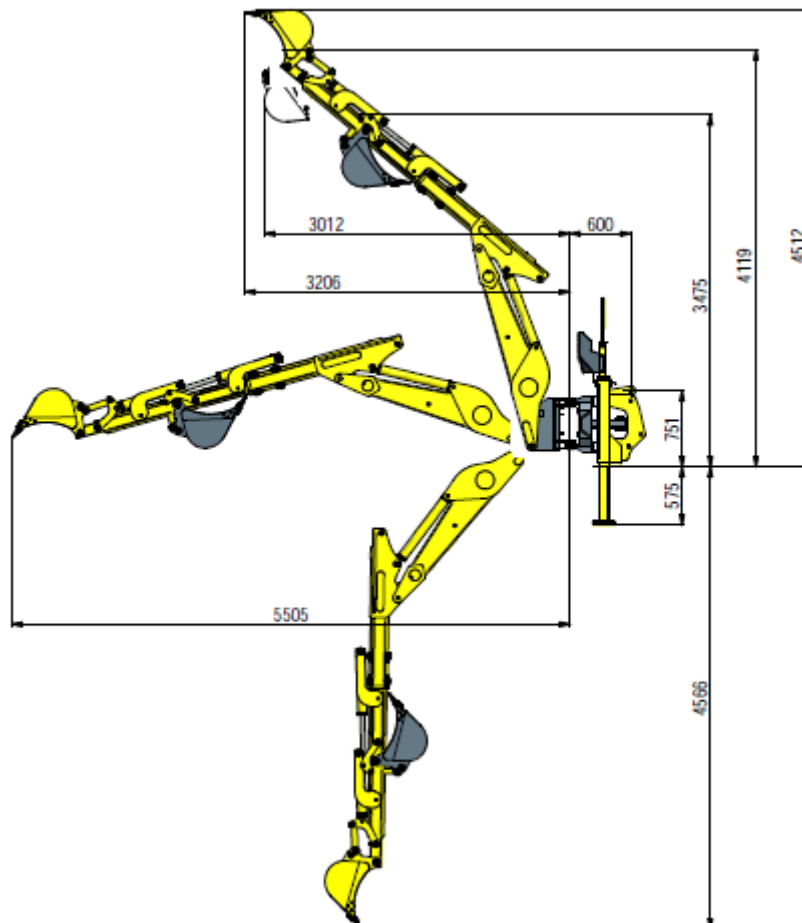



SPECIAL EQUIPMENT:

- Higher capacity pump 70 l/min. Bigger distributor with more elements and two additional lines 1/2" to the end of the boom near the bucket. With the two additional line it is possible to attach every accessories.



- Command into the cabin. Prolungation of the hoses into the cabin. There is not the seat outside and the distributor has to fixed into the cabin. It is indicated for tractor with reversible seat. The installation is a cure to the customers. For some customer could be a problem to make the attachment for the commands into the cabin, so this option could be excluded from the special equipment and take the backhoe with the normal seat.

